

# BLUELINE

---

## HEAVY DUTY RIGID HANDCUFFS



**10% BIGGER\***

PERFECT FOR HANDCUFFING LARGER SUSPECTS

\*THAN COMPARISON PRODUCTS

**THANK YOU FOR PURCHASING ONE OF THE  
FINEST QUALITY HANDCUFFS AVAILABLE**

Your BLUELINE HD RIGID CUFFS are packed with features;

- BlueLine Handcuffs are extended by 10% making it easier to handcuff larger suspects.
- Reinforced steel rivets for added strength and durability.
- Built-in back-loading for fast cuffing.
- Rigid connecting bar for immense rigidity and strength (see right).
- Stainless steel construction which is hypoallergenic and highly durable.



BLUELINE HD RIGID HANDCUFFS have a back-loading feature for faster and more reliable cuffing. The single bar can be snapped back or pulled into place. The handcuffs can be carried in the ready position where slight contact with the subjects wrist will activate the single bar to swing and engage the ratchet.

Be sure to follow these safety guidelines when using your **BLUELINE HD RIGID CUFFS**.

- Always keep the subject under surveillance and control
- Always apply handcuffs prior to subject search
- Always handcuff the subject to the rear, palms out
- Always **DOUBLE-LOCK** the handcuffs


**SUPPLIED TO YOU BY OUR AUTHORISED RETAILER:**



**NITON999  
EQUIPMENT**

NITON999 EQUIPMENT LTD  
NITON HOUSE, PRIESTLEY WAY, CRAWLEY, RH10 9NT  
CALL: 01293 549858 [WWW.NITON999.CO.UK](http://WWW.NITON999.CO.UK)

# BLUELINE HEAVY DUTY RIGID CUFFS INSTRUCTIONS

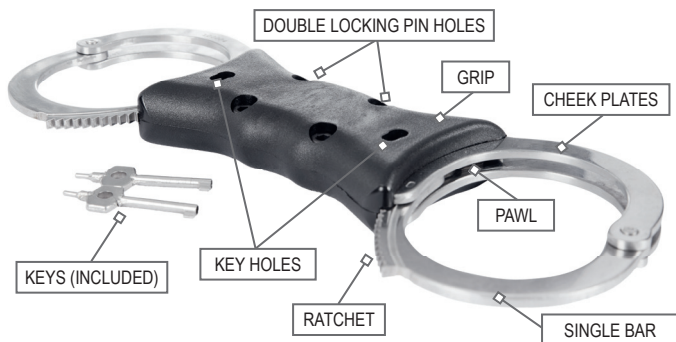

## BLUELINE HD RIGID CUFFS OPERATION

To operate your handcuffs, push the single bar against the wrist of the subject. When sufficient pressure is achieved, the single bar will release from the ratchet and rotate around the subjects wrist, engaging the ratchets as it does so. Once the handcuffs are locked around the wrist, a key is required to remove them.

## DOUBLE LOCKING YOUR BLUELINE HD RIGID CUFFS

To double-lock the handcuffs, first adjust the bracelet so that it fits snugly, but comfortably on the subject's wrist then depress the double locking pin actuator using the pin on the key. ALWAYS ask the subject if the handcuffs are comfortable before double-locking your handcuffs.

## UNLOCKING YOUR BLUELINE HD RIGID CUFFS

To unlock the handcuff, insert the key in the key hole and turn 90°. This will release the double-lock. Then turn the key in the opposite direction, which will release the pawl from the ratchet bars.

## MAINTENANCE OF YOUR BLUELINE HD RIGID CUFFS

You have purchased one of the finest quality handcuffs available, which if correctly maintained, will provide you with many years of trouble free service. On a regular basis, lubricate sparingly the pivot point at which the single bar rotates around the rivet, with a light oil. Similarly, apply light lubrication to the pawl. Rotate the single bar to ensure free rotation, and wipe off excess lubricant.

## WARRANTY OF YOUR BLUELINE HD RIGID CUFFS

BLUELINE HD HANDCUFFS are warranted to be free from defects in materials and workmanship under normal use for the life of the handcuff.

If you believe this product has any defects in materials or workmanship, cease use immediately and contact your supplier.

Be sure to follow these safety guidelines when using your **BLUELINE HD RIGID CUFFS**.

- Always keep the subject under surveillance and control
- Always apply handcuffs prior to subject search
- Always handcuff the subject to the rear, palms out
- Always **DOUBLE-LOCK** the handcuffs

**BLUELINE**

BLUELIGHT DIRECT LTD. CRAWLEY, WEST SUSSEX, RH10 9NT  
TEL: 01293 402025 EMAIL: SALES@BLUELIGHTDIRECT.CO.UK